

N 70, Integrated Design Hood, 60 cm, clear glass black  
printed  
D65XAM2S0B



COOKING PASSION SINCE 1877



B

Our invisible integrated design hood - perfectly integrated with extra storage for easy access items, such as spices and herbs.

- ✓ Hidden Design – Seamlessly integrate your hood in a flush fitted cupboard design
- ✓ Extra Storage Space – The hood's T-shaped design creates extra space for many large and handy items up to 10kg on each side
- ✓ Reduced Noise: the low-noise motor makes it possible to listen to your own kitchen story
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ Comfort Control - Automatic recognition of the glass panel position switches your hood and light on/off. No need to open the kitchen cabinet to control your hood, lifting the glass panel is enough.

#### Features

##### Technical Data

Typology : Built-in/Built-under  
Approval certificates : CE, E17D UKCA marking, VDE  
Length of electrical supply cord : 130 cm  
Required niche size for installation (HxWxD) : 340mm x 560.0mm x 300mm mm  
Height of product, without chimney : 60 mm  
Minimum distance above an electric hob : 430 mm  
Minimum distance above a gas hob : 650 mm  
Net weight : 9.4 kg  
Type of control : Electronic  
Maximum output air extraction : 460 m<sup>3</sup>/h  
Boost position output recirculating : 652 m<sup>3</sup>/h  
Maximum output recirculating air : 451 m<sup>3</sup>/h  
Boost position air extraction : 749 m<sup>3</sup>/h  
Number of lights (Stck) : 2  
Noise level : 63 dB(A) re 1 pW  
Diameter of air outlet : 120 / 150 mm  
Grease filter material : Washable stainless steel  
EAN code : 4242004260080  
Connection rating : 256 W  
Voltage : 220-240 V  
Frequency : 50 Hz  
Plug type : GB plug  
Installation type : Built-in

#### Optional accessories

Z51IBI6X4	Clean Air Standard recirculation kit
Z51IBK1S1	Chimney extension 450-854 mm
Z51IBN1S1	Chimney extension 187-360 mm
Z51ITD1X1	Long Life recirculation kit external
Z51IXB1X6	Clean Air Plus odor filter (replacement)
Z51IXC1X6	Clean Air Plus recirc. kit external



4 242004 260080

*N 70, Integrated Design Hood, 60 cm, clear glass  
black printed  
D65XAM2S0B*



COOKING PASSION SINCE 1877

## Features

### Variant

- 60 cm wide
- Installation: Cupboard 60 cm
- Suitable for ducted extraction and recirculation
- For recirculated extraction various recirculation kits are available as optional accessories.

### Design

- Flush-fitted installation for a seamless integration in wall cupboards.
- Space efficient compact design for extra storage possibilities on the hood, up to max. 10 kg storage weight per side.
- Glass panel with touch control for an easy operation and enhanced vapor capture.
- Extraction and lighting are automatically turned on and off by opening and closing the glass panel.
- Lighting can also be turned on and off when the glass panel is closed by quick hand touch on control panel.
- Includes mats for hood storage areas, protection against scratches and to help prevent items moving in this space.

### Features

- Electronic controls via Touch control
- 3 speeds plus intensive
- SoftLight with dimmer function
- 2 x 2 W LED lights
- Colour Temperature: 3500 K
- Light Intensity: 451 lux
- Automatic revert setting
- Automatic intensive revert (6mins)
- Stainless steel filter covers
- 2 metal grease filter cassettes
- Easy to clean smooth surfaces and materials.

### Performance

- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 460 m<sup>3</sup>/h  
Intensive 749 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:  
Max. normal use: 63 dB(A) re 1 pW  
Intensive: 73 dB(A) re 1 pW
- Noise max. Normal Level: Noise, max. speed in normal use: 63 dB dB\*
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:  
Extraction rate in recirculation mode: Max. normal use: 451 m<sup>3</sup>/h  
Intensive: 652 m<sup>3</sup>/h  
Noise level in recirculation mode: Max. normal use: 67 dB(A) re 1 pW  
Intensive: 74 dB(A) re 1 pW

### Planning and installation information

- Installation system: IDH comfort installation
- Suitable for installation in bottomless wall cupboards.
- Enclosed spacers for installation in wall cupboards with maximum depth of up to 360 mm.
- For installation in higher wall cupboards chimney extensions are available as optional accessories.
- Chimney extensions are compatible with the available recirculation kits.
- Dimensions (HxWxD): 340 x 597 x 298 mm
- Built-in dimensions (HxWxD): 340 x 560 x 300 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Back-pressure flap: Yes
- Electrical cable length 1.3 m
- Please reference the built-in dimensions provided in the installation drawings

### Consumption Data

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 62.7 kWh/year\*
- Blower Efficiency Class: B\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Power rating: 256 W


\* In accordance with the EU-Regulation No 65/2014

N 70, Integrated Design Hood, 60 cm, clear glass  
black printed  
D65XAM2S0B


Dimensioned drawings

measurements in mm

**Front view**

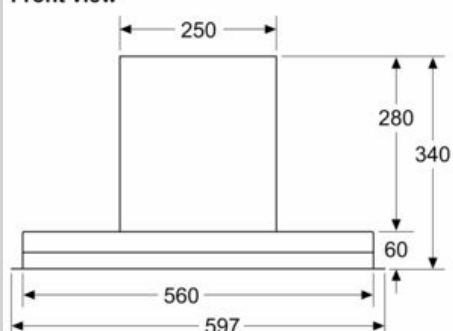


measurements in mm

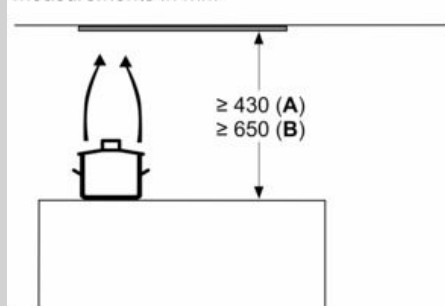

from upper edge of pan support  
**A:** min. 430 electric  
**B:** min. 650 gas

measurements in mm


**Installation example**

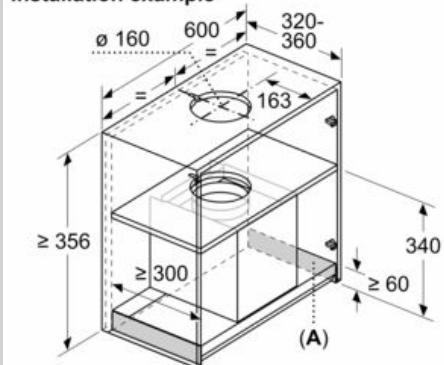


**A:** Area without hinges

measurements in mm

**side view**

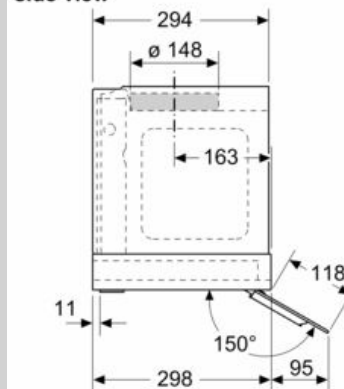

measurements in mm

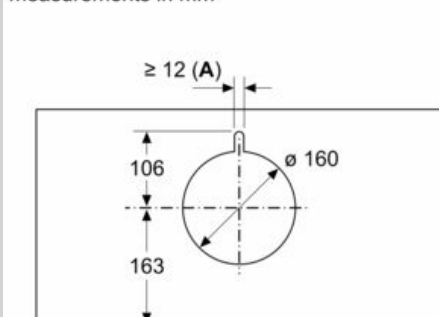

**A:** Cable bushing