


CLEAN AIR PLUS RECIRCULATION KIT Z51XC1X6

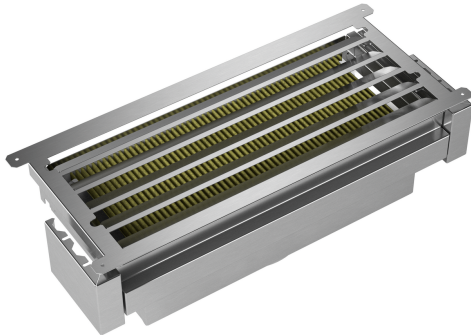

Features

Technical Data

Dimensions of the packed product (HxWxD): . 280 x 700 x 300 mm

Pallet dimensions: 190.0 x 80.0 x 120.0

Standard number of units per pallet: 24

EAN code:4242004244912



CLEAN AIR PLUS RECIRCULATION KIT Z51XC1X6

Features


Optional accessories

- For recirculation operation
- Can be combined with slimline hoods and selected canopy hoods.
- Odour reduction > 90%
- Lifetime of CleanAir Plus odour filter 12-18 months
- Anti-fish functionality: Especially treated against fish smell
- Anti-pollen functionality: The filter retains 99% of airborne pollen and deactivates allergens which are retained by the filter.
- For assembly in the upper cabinet
- Consisting of filter housing with design cover, Clean Air Plus active carbon filter, flexible hose, 2 hose clamps and mounting material

CLEAN AIR PLUS RECIRCULATION KIT Z51XC1X6


Dimensioned drawings

Measurements in mm Installation of canopy hood with circulated air kit

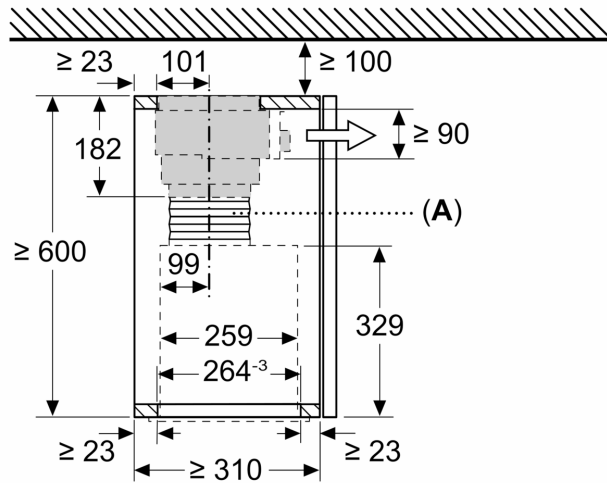


A: Flexible hose

Measurements in mm Installation of canopy hood with circulated air kit

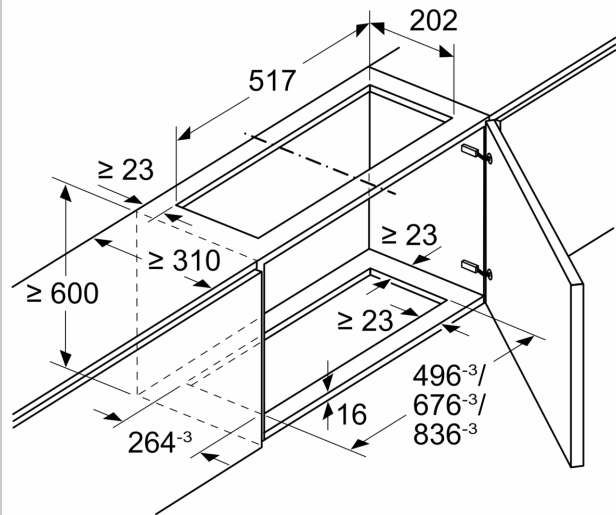


Measurements in mm Installation of telescopic hood with circulated air kit and lowering frame


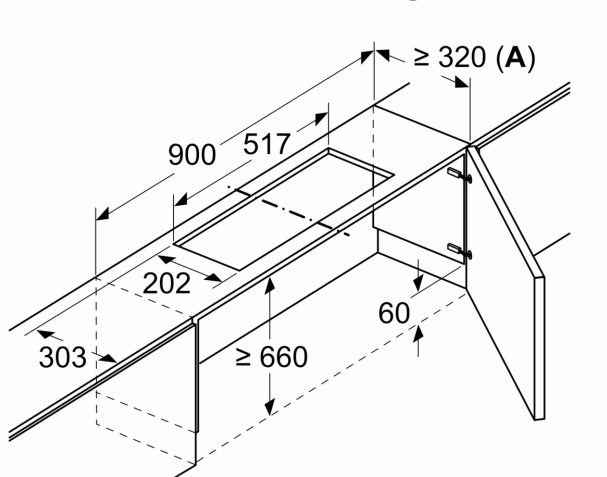


A: See combination table


Measurements in mm Installation of telescopic hood with circulated air kit and lowering frame

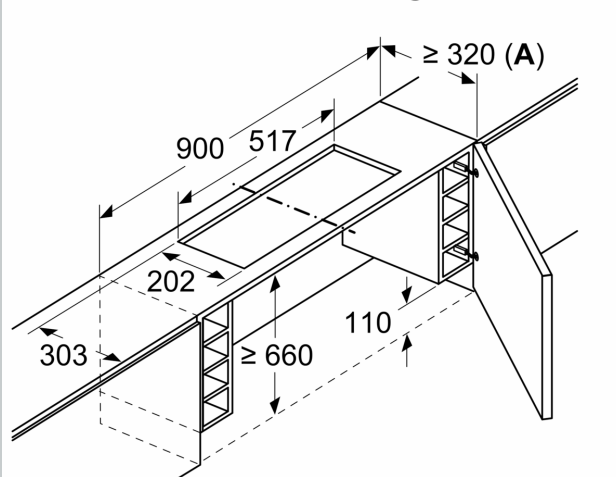

A: See combination table

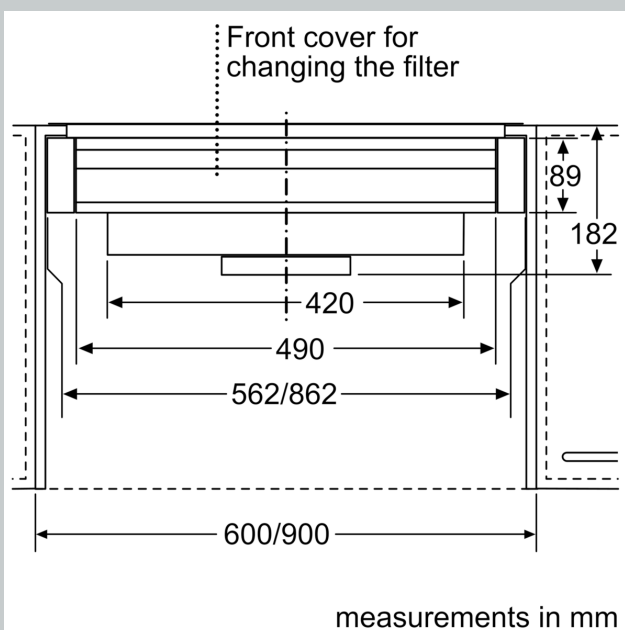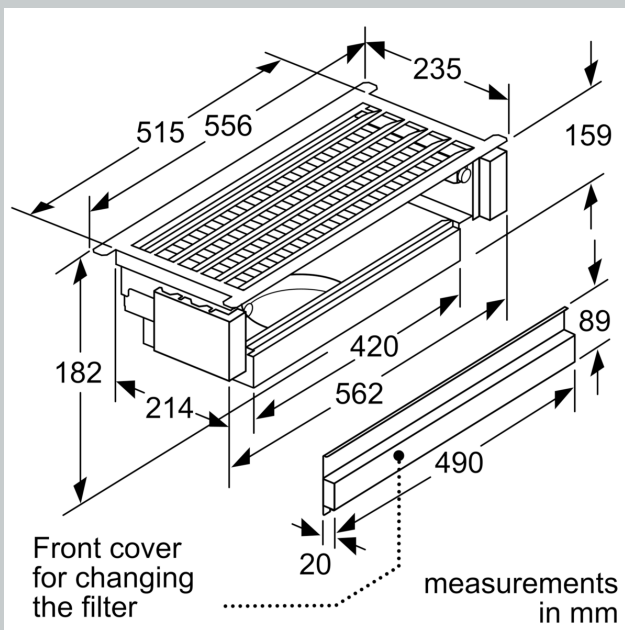


Measurements in mm
Installation of telescopic hood with circulated air kit

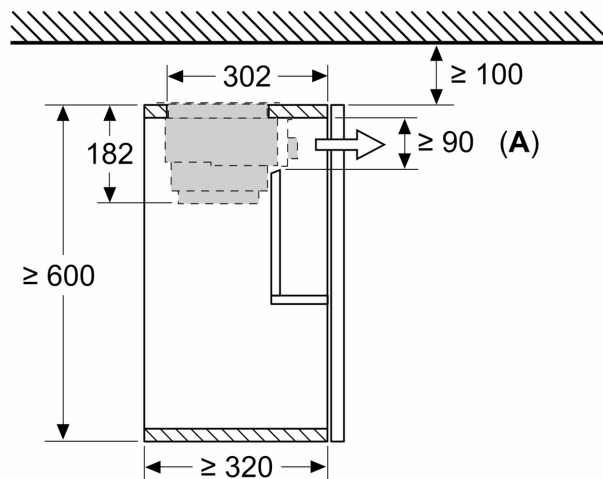

A: Filter change


Measurements in mm
Installation of telescopic hood with circulated air kit

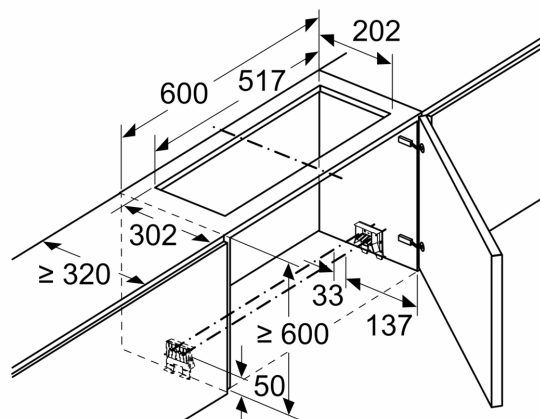

Not possible to use a circulated air kit for cupboards with transverse cross-members (lifting doors)


Dimensioned drawings

Measurements in mm

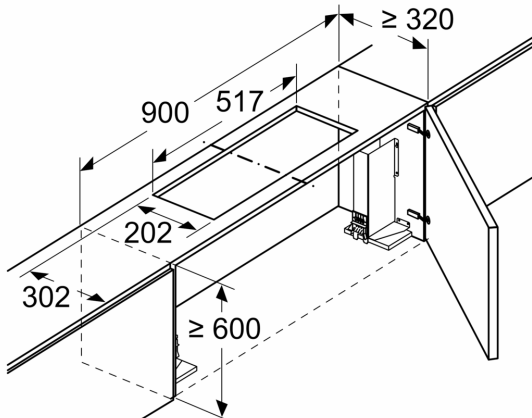Installation of telescopic hood with circulated air kit


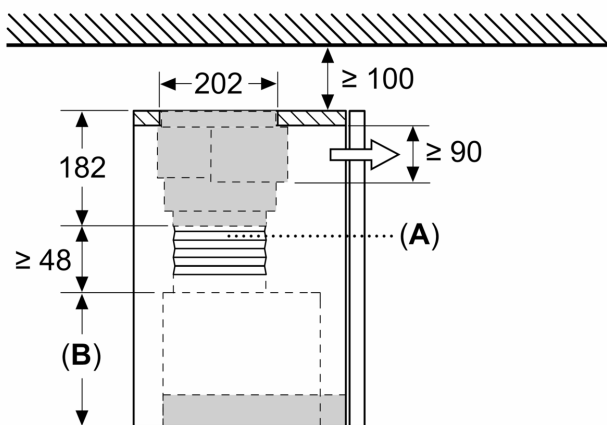
Not possible to use a circulated air kit for cupboards with transverse cross-members (lifting doors)

Measurements in mm

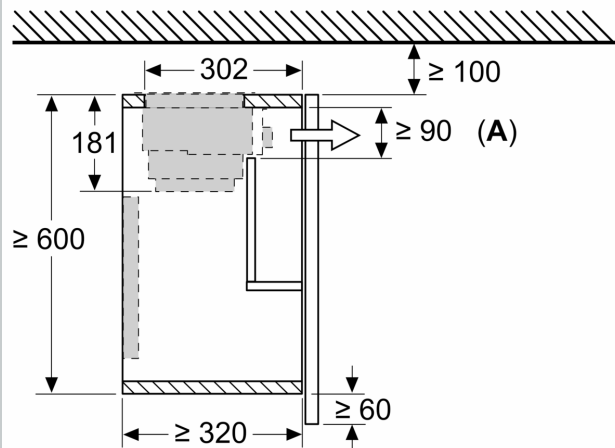Installation of telescopic hood with circulated air kit and lowering frame


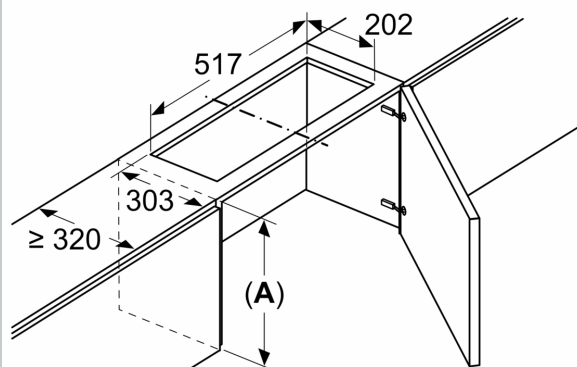
A: Filter change

Measurements in mm

Installation of integrated design hood with circulated air kit


A: Flexible hose
B: Appliance height

Measurements in mm

Installation of integrated design hood with circulated air kit


Not possible to use a circulated air kit for cupboards with transverse cross-members (lifting doors)

A: \geq appliance height + 230 mm