

*N 70, CANOPY COOKER HOOD, 86 CM, BLACK  
D86NAC1S0B*



Canopy hood: designed to fit neatly under an overhead unit or cabinet. They're discreet and effectively use valuable space.

- ✓ Hidden Design: Seamlessly integrate your hood in a flush fitted cupboard design.
- ✓ High extraction rate - for continuously clean air in the kitchen.
- ✓ Reduced Noise: our optimised motor guarantees a quiet cooking experience.
- ✓ LED Lighting: clear illumination while you cook.
- ✓ Intensive Setting: the powerful way to beat intense steam during cooking, with automatic revert.

|           |                                          |
|-----------|------------------------------------------|
| Z5135X1   | Standard odor filter (replacement)       |
| Z5135X3   | Standard recirculation kit               |
| Z51ITD1X1 | Long Life recirculation kit external     |
| Z51ITP0X0 | Long Life odor filter (replacement)      |
| Z51IXB1X6 | Clean Air Plus odor filter (replacement) |
| Z51IXC1X6 | Clean Air Plus recirc. kit external      |

Typology: ..... Built-in/Built-under  
 Length electrical supply cord: ..... 150.0 cm  
 Required niche size for installation (HxWxD): ..... 345mm x 676.0mm x 264mm mm  
 Height of the appliance: ..... 345 mm  
 Minimum distance above an electric hob: ..... 500 mm  
 Minimum distance above a gas hob: ..... 650 mm  
 Net weight: ..... 10.0 kg  
 Type of control: ..... Electronic  
 Number of speed settings: ..... 3-stages + intensive setting  
 Maximum output air extraction: ..... 600 m³/h  
 Boost position output recirculating: ..... 700 m³/h  
 Maximum output recirculating air: ..... 580 m³/h  
 Boost position air extraction: ..... 745 m³/h  
 Maximum Air flow: ..... 600 m³/h  
 Number of lights: ..... 2  
 Noise level: ..... 61 dB(A) re 1pW  
 Diameter of air outlet: ..... 120 / 150 mm  
 Grease filter material: ..... Washable aluminium  
 EAN code: ..... 4242004287216  
 Connection Rating: ..... 252 W  
 Fuse protection: ..... 3 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz  
 Plug type: ..... GB plug  
 Installation typology: ..... Built-in



## N 70, CANOPY COOKER HOOD, 86 CM, BLACK D86NAC1S0B

### Design:

- Canopy hood
- Installation: Cabinet
- Flush-fitted installation for a seamless integration in wall cupboards.
- Suitable for ducted extraction and recirculation
- For recirculated extraction various recirculation kits are available as optional accessories.

### Core Features:

- 2 x 1W LED lights
- Colour Temperature: 4000 K
- Light Intensity: 400 lux
- Capacitor motor
- 2 metal grease filter(s).

### Comfort Features:

- Soft touch control with LED display
- 3 speeds plus intensive
- Automatic reset from intensive to normal setting after 6 min

### Cleaning Comfort:

- metal grease filter dishwasher-safe
- Easy to clean smooth surfaces and materials.

### Performance Exhaust:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 285 m<sup>3</sup>/h; noise level 45 dB (A) re1pW Speed 2: extraction rate 410 m<sup>3</sup>/h; noise level 51 dB (A) re1pW Speed 3: extraction rate 600 m<sup>3</sup>/h; noise level 61 dB (A) re1pW Intensive 1: extraction rate 745 m<sup>3</sup>/h; noise level 65 dB (A) re1pW
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 50.1 kWh/year\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: D\*

### Performance Recirculation:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory): Speed 1: extraction rate 200 m<sup>3</sup>/h; noise level 59 dB (A) re1pW Speed 2: extraction rate 370 m<sup>3</sup>/h; noise level 71 dB (A) re1pW Speed 3: extraction rate 440 m<sup>3</sup>/h ; noise level 73 dB (A) re1pW Intensive Speed 1: extraction rate 460 m<sup>3</sup>/h; noise level 74 dB (A) re1pW
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Clean Air plus recirculation kit, for chimless installation (available as optional accessory): Speed 1: extraction rate 270 m<sup>3</sup>/h ; noise level 51 dB (A) re1pW Speed 2: extraction rate 390 m<sup>3</sup>/h ; noise level 71 dB (A) re1pW Speed 3: extraction rate 580 m<sup>3</sup>/h ; noise level 69 dB (A) re1pW Intensive Speed 1: extraction rate 700 m<sup>3</sup>/h ; noise level 74 dB (A) re1pW

### Technical Information and Sustainability:

- Consumption data:


- Power rating: 252 W
- Voltage: Nominal voltage: 220 - 240 V
- Sustainability:
- Environmentally friendly packaging
- Available odour filter as regenerative Long Life filter with 10 years lifetime

### Planning and Installation Information:


- Dimensions (HxWxD): 345 x 860 x 282 mm
- Dimensions recirculating (HxWxD): 345-345 x 860 x 282 mm
- Built-in dimensions (HxWxD): 345 x 676 x 264 mm
- Please reference the built-in dimensions provided in the installation drawings
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Back-pressure flap: Yes

N 70, CANOPY COOKER HOOD, 86 CM, BLACK  
D86NAC1S0B


Measurements in mm

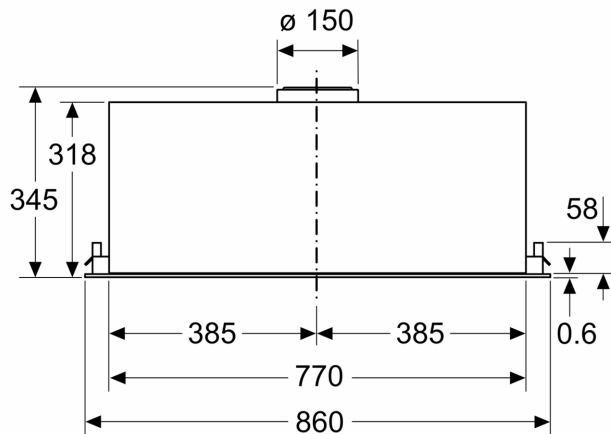


Measurements in mm

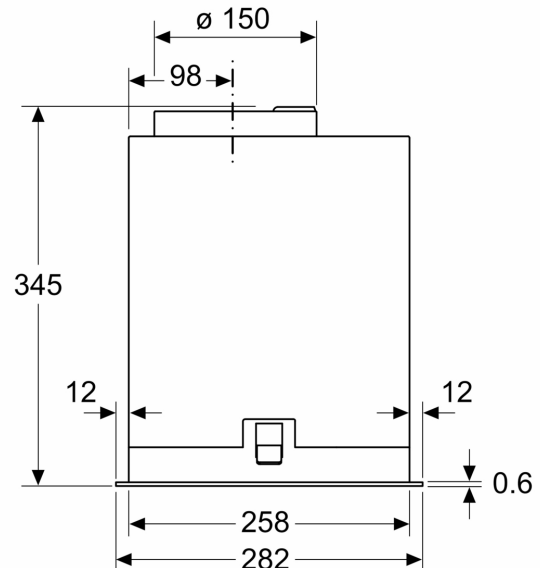

Measurements in mm

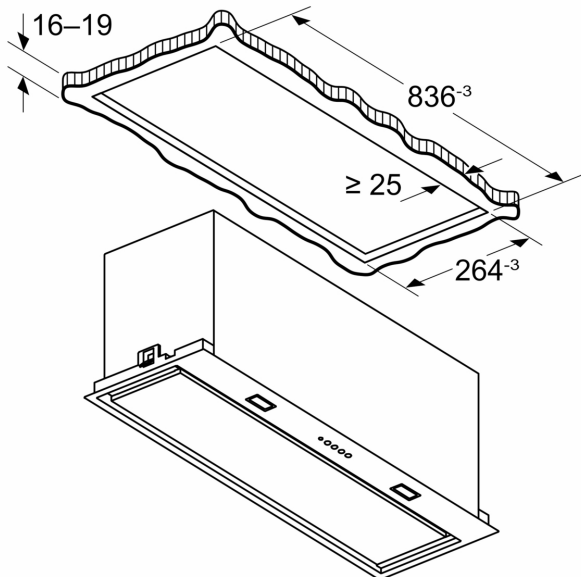

Measurements in mm

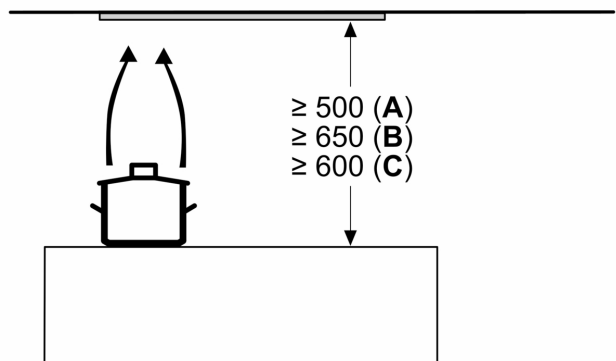

**A:** Electric

**B:** Gas - from upper edge of pan support

**C:** Electric - for Australia and New Zealand